



QUALITY RANGE
LARGE BOW SHACKLES
 TO BS 3032 - 1958 - TABLE 3
 TYPE 'A' SCREW PIN - TESTED AND CERTIFIED

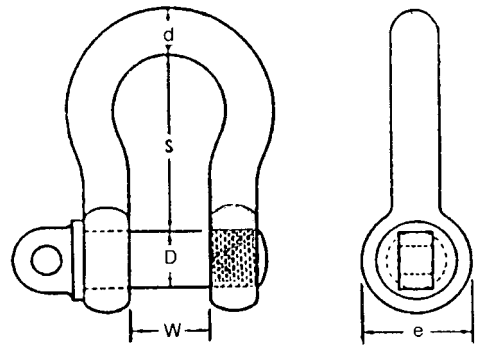

SWL TONS	d in	D in	W in	S in	e in	WEIGHT EACH KGS
0.15	1/4	3/8	1/2	1.1/8	3/4	0.08
0.45	3/8	1/2	5/8	1.5/8	1	0.18
0.75	1/2	5/8	7/8	2.1/8	1.1/4	0.34
1.25	5/8	3/4	1.1/8	2.3/4	1.1/2	0.65
2.00	3/4	7/8	1.3/8	3.3/8	1.3/4	1.08
2.75	7/8	1	1.5/8	3.7/8	2	1.80
3.75	1	1.1/8	1.3/4	4.1/4	2.1/4	2.46
4.75	1.1/8	1.1/4	2	4.7/8	2.1/2	3.47
5.75	1.1/4	1.3/8	2.1/4	5.3/8	2.3/4	4.56
7.25	1.3/8	1.1/2	2.1/2	6	3	6.07
8.50	1.1/2	1.3/4	2.3/4	6.5/8	3.1/2	8.35
9.50	1.5/8	1.7/8	3	7.3/8	3.3/4	11.81
11.50	1.3/4	2	3.3/8	8.1/8	4	14.32
13.00	1.7/8	2.1/8	3.5/8	8.3/4	4.1/4	17.03
15.00	2	2.1/4	3.7/8	9.3/8	4.1/2	20.00

QUALITY RANGE
SMALL BOW SHACKLES
 TO BS 3032 - 1958 - TABLE 4
 TYPE 'A' SCREW PIN - TESTED AND CERTIFIED

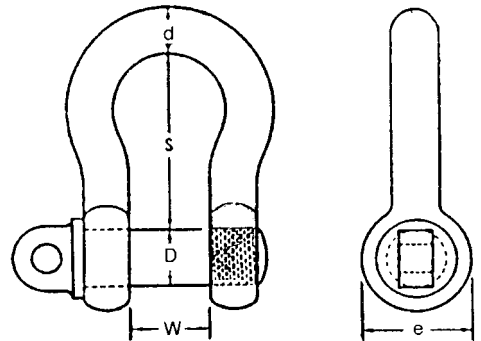

SWL TONS	d in	D in	W in	S in	e in	WEIGHT EACH KGS
0.50	3/8	1/2	5/8	1.1/2	1	0.18
1.00	1/2	5/8	7/8	2	1.1/4	0.34
1.50	5/8	3/4	1.1/8	2.1/2	1.1/2	0.62
2.00	3/4	7/8	1.3/8	3	1.3/4	1.05
3.00	7/8	1	1.1/2	3.1/2	2	1.63
4.00	1	1.1/8	1.3/4	4	2.1/4	2.28
5.00	1.1/8	1.1/4	2	4.1/2	2.1/2	3.20
6.25	1.1/4	1.3/8	2.1/4	5	2.3/4	4.54
7.50	1.3/8	1.1/2	2.3/8	5.1/2	3	5.74
9.25	1.1/2	1.3/4	2.5/8	6	3.1/2	8.51
10.50	1.5/8	1.7/8	2.7/8	6.1/2	3.3/4	11.23
12.50	1.3/4	2	3.1/8	7	4	13.47