


**ELECTRICALLY WELDED MILD STEEL
SHORT LINK CHAIN**


UNTESTED

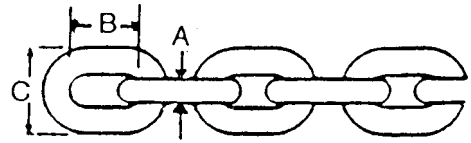

| A | A | WORKING LOAD LIMIT | B | C | WEIGHT PER METRE |
|------|------|-----------------------|------|------|---------------------|
| in | mm | KGS | mm | mm | KGS |
| 3/16 | 5.0 | 250 | 19.0 | 17.0 | 0.59 |
| 1/4 | 6.0 | 600 | 18.0 | 20.0 | 0.85 |
| 5/16 | 8.0 | 875 | 24.0 | 26.0 | 1.32 |
| 3/8 | 9.5 | 1400 | 33.0 | 33.0 | 1.85 |
| 1/2 | 12.5 | 2400 | 36.0 | 44.0 | 3.25 |
| 5/8 | 16.0 | 3625 | 48.0 | 54.0 | 5.60 |

**ELECTRICALLY WELDED MILD STEEL
LONG LINK CHAIN**

UNTESTED

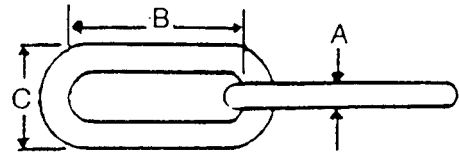

| A | A | WORKING LOAD LIMIT | B | C | WEIGHT PER METRE |
|------|------|-----------------------|------|------|---------------------|
| in | mm | KGS | mm | mm | KGS |
| 3/16 | 5.5 | 250 | 25.0 | 21.0 | 0.53 |
| 1/4 | 7.0 | 625 | 38.0 | 29.0 | 0.88 |
| 5/16 | 8.0 | 600 | 50.0 | 33.0 | 1.08 |
| 3/8 | 9.5 | 1125 | 50.0 | 38.0 | 1.57 |
| 1/2 | 12.5 | 2125 | 66.0 | 48.0 | 2.56 |
| 5/8 | 16.0 | 3300 | 63.5 | 57.0 | 4.97 |